

E4040SA2N2A.ACWE000



- Energy savings up to 51% (35.5W for replacing T8 36W X 2 fixture)
- Optimized light distribution with low glare
- Suitable for installation in harsh environment (IP65 / IK08)
- Flexible bracket mounting positions and wiring options
- Application
 - Warehouses, Parking garages, Construction sites


Specification



Type	Waterproof	Beam angle (°)	110
Equivalent to (W)	T8 36W x2	Color temperature (K)	4,000
Wattage (W)	35.5	Color rendering index (Ra)	82
Lumen output (lm)	4,000	Operating temperature (°C)	-30 ~ +40
Efficacy (lm/W)	113	Average lifetime (hrs)	50,000 (L80B10)
Voltage (V AC)	220 ~ 240	Dimensions (DxWxH, mm)	1200 x 90 x 78
Frequency (Hz)	50/60	Weight (kg)	1.8
Input current (mA)	Max. 200	IP / IK Level	65 / 08
Power factor	> 0.9	Surge Protection (kV)	< 1.0
THD (%)	< 14.5	Glow wire test (°C)	850
Inrush current (A)	Max. 18.0 (I peak max)	Dimmable	No
T_50% I peak (µsec)	1.0	Certification	CE

※ Specifications are subject to change without notice

Dimensions

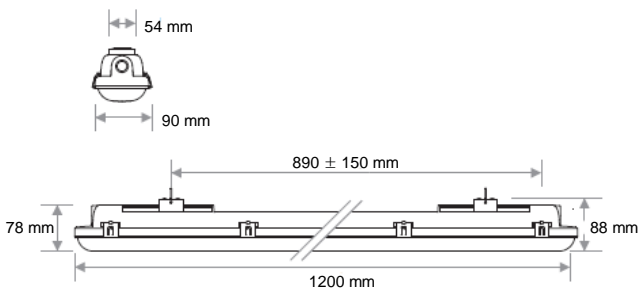

Photometric Data

